



**HAL**  
open science

## Angle-dependent SIBC model of metamaterial in conformal FDTD method

Samuel Gaucher, Christophe Guiffaut, Alain Reineix, Olivier Cessenat

► **To cite this version:**

Samuel Gaucher, Christophe Guiffaut, Alain Reineix, Olivier Cessenat. Angle-dependent SIBC model of metamaterial in conformal FDTD method. 2022 IEEE MTT-S International Conference on Electromagnetic and Mutiphysics Modeling and Optimization (NEMO2022), Jul 2022, LIMOGES, France. hal-03768107

**HAL Id: hal-03768107**

**<https://unilim.hal.science/hal-03768107>**

Submitted on 2 Sep 2022

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Angle-dependent SIBC model of metamaterial in conformal FDTD method

Samuel Gaucher<sup>1</sup>, Christophe Guiffaut<sup>2</sup>, Alain Reineix<sup>2</sup> and Olivier Cessenat<sup>1</sup>

<sup>1</sup>CEA CESTA, Le barp, France

<sup>2</sup>XLIM, Limoges, France

**Abstract**—To control the diffraction of a target illuminated by a radar wave, one technique is to consider metamaterials. Simulating their behaviour can be complex especially when they are applied as thin heterogeneous layers on the surface of the target. This can be achieved, by first determining an angle-dependent surface impedance model, that is after implemented in a 3D conformal FDTD solver.

**Index Terms**—conformal FDTD, metamaterial, SIBC.

## I. INTRODUCTION

The interest of using a surface impedance model (SIBC) is multiple. First, it avoids meshing a complex geometry covering some parts of the target. Then, the spatial mesh can be released. Indeed, it is supposed to be small enough to capture the field variations inside the thin layer of metamaterials. Since the latter is replaced by a SIBC model, the chosen spatial mesh can be larger because it is not governed anymore by the thin layer thickness. As a result, the computational volume is reduced as  $\alpha^3$  and the computational time by  $\alpha^4$  where  $\alpha$  is the factor of relaxed meshing.

For this purpose, both the wideband and efficiency finite-difference time-domain (FDTD) method is used to compute the electromagnetic fields. In a first step, the surface impedances are calculated with the Spectral FDTD (SFDTD) scheme [1] for all incidence angles and for the TE and TM modes. SFDTD method is a good candidate because no additional constraint is needed on the CFL criterion. Thus, periodic Floquet boundary conditions (PBC) are applied around the elementary pattern of the periodic metamaterial. In a second step, the frequency-angle-polarization-dependent SIBC model is decomposed by the vector fitting (VF) technique [2] and the Leontovich relation is used to introduce the metamaterial on the target surface [3]. This approach allows a simple and efficient calculation of the tangential electric field at the metamaterial surface. Moreover, the VF decomposition avoids the processing of a convolution product in the time domain.

## II. SFDTD CALCULATION OF SURFACE IMPEDANCES

Metamaterial is simulated with the SFDTD method [1] by introducing periodic boundary conditions around an elementary pattern of the periodic structure. The surface impedance is deduced for all incident elevation  $\theta$  and azimuth  $\varphi$  angles and for the TE and TM polarisations of an incident plane wave.

Surface impedances  $Z$  are then decomposed by the VF technique [2] to facilitate processing in the time domain

$$Z^{\text{TE,TM}}(\omega, \theta, \varphi) = r_0 + \sum_{n=1}^N \frac{k_n}{j\omega - \omega_n}, \quad (1)$$

where  $r_0$  is the resistance,  $k_n$  the residus et  $\omega_n$  the poles.

## III. OBLIQUE SIBC IN FDTD METHOD

Let  $k$  be the unit vector along the incident axis. For each cell containing an interface with a metamaterial, we identify the local basis  $(u, v, n)$  where  $n$  is the normal outgoing unit vector and  $(u, v)$  are the unit tangential vectors of the metamaterial. After determining the local elevation angle

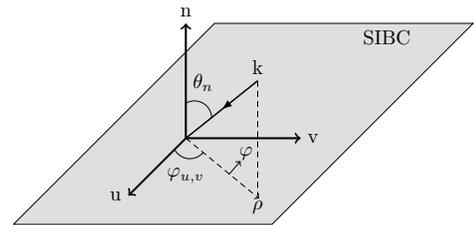


Fig. 1. Local basis  $(u, v, n)$  at an interface between air and a metamaterial.

$\theta_n$  and azimuth  $\varphi_{u,v}$ , the electric field components in the cylindrical basis  $(\rho, \varphi)$  are then calculated by the Leontovich relation

$$\begin{bmatrix} E_\rho \\ E_\varphi \end{bmatrix} = \begin{bmatrix} 0 & -Z_\rho(\omega, \theta_n, \varphi_{u,v}) \\ Z_\varphi(\omega, \theta_n, \varphi_{u,v}) & 0 \end{bmatrix} \begin{bmatrix} H_\rho \\ H_\varphi \end{bmatrix}. \quad (2)$$

Note that the metamaterial surface impedances  $Z_\rho$  and  $Z_\varphi$  in (2) are known as they have been previously computed by the SFDTD method for all incident angles in section II. The conformal FDTD resolution will be described in the final paper and numerical examples will be illustrated.

## REFERENCES

- [1] S. P. Gaucher, C. Guiffaut, A. Reineix, O. Cessenat, and G. Maze-Merceur, "Wideband simulations of periodic structures by the Hybrid Spectral FDTD/TD-VFz Method," *IEEE Antennas and Wireless Propagation Letters*, 2022.
- [2] B. Gustavsen and A. Semlyen, "Rational approximation of frequency domain responses by vector fitting," *IEEE Transactions on power delivery*, vol. 14, no. 3, pp. 1052–1061, 1999.
- [3] I. D. Flintoft, S. A. Bourke, J. F. Dawson, J. Alvarez, M. R. Cabello, M. P. Robinson, and S. G. Garcia, "Face-centered anisotropic surface impedance boundary conditions in FDTD," *IEEE Transactions on Microwave Theory and Techniques*, vol. 66, no. 2, pp. 643–650, 2017.